



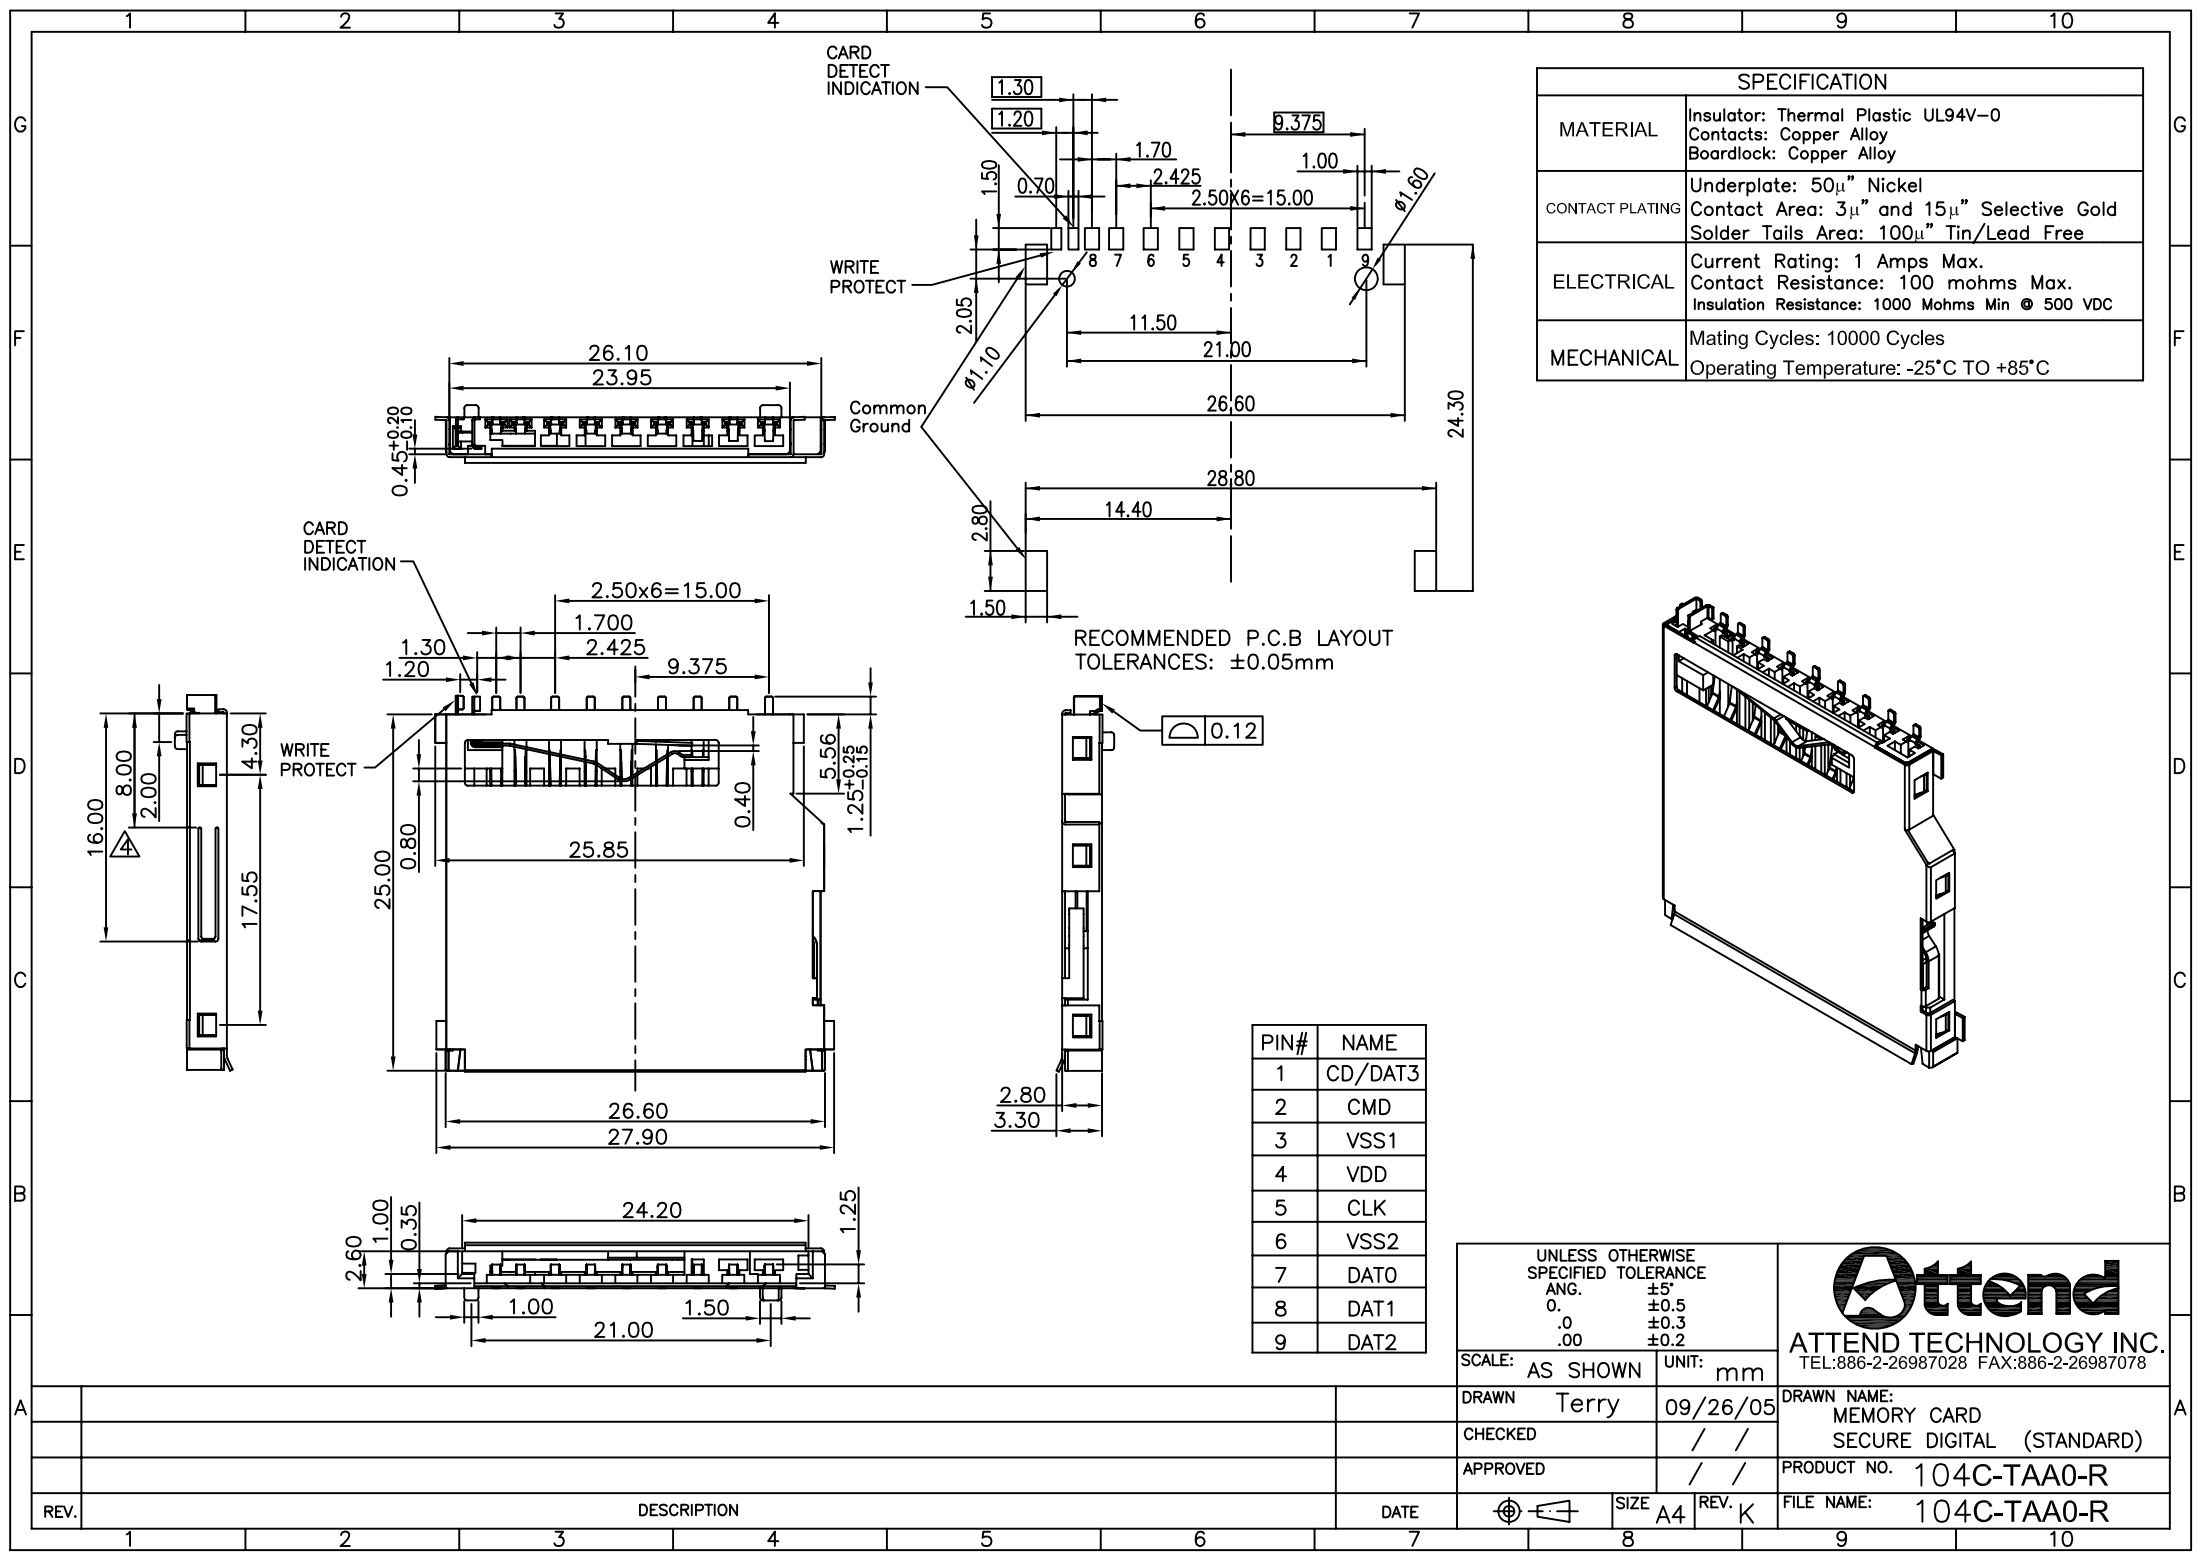

SPECIFICATION	
MATERIAL	Insulator: Thermal Plastic UL94V-0 Contacts: Copper Alloy Boardlock: Copper Alloy
CONTACT PLATING	Underplate: 50 μ " Nickel Contact Area: 3 μ " and 15 μ " Selective Gold Solder Tails Area: 100 μ " Tin/Lead Free
ELECTRICAL	Current Rating: 1 Amps Max. Contact Resistance: 100 mohms Max. Insulation Resistance: 1000 Mohms Min @ 500 VDC
MECHANICAL	Mating Cycles: 10000 Cycles Operating Temperature: -25°C TO +85°C

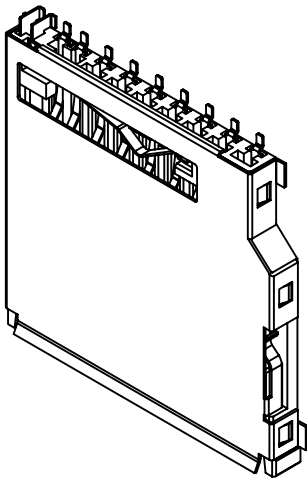

REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME:
1			A4	K	104C-TAA0-R