


ZL20 SERIES 2.54 MM (0.100") PIN HEADER BASIC STACK TYPE


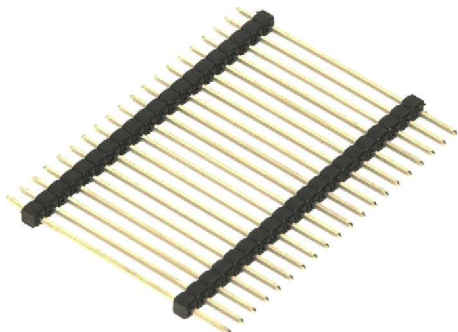


Specification:

- 1) To +105° Current Rate: 3 A
- 2) Dielectric Withstanding Voltage: 500 VAC
- 3) Insulation Resistance: 5000 MW
- 4) Temperature: -55°C ~ 105°C
- 5) Insulator: Thermoplastic (UL94V-0)

Series No.	No. of Contact (N)	Contact Plating	C	D	L1	E
ZL2029-20-T	20	Tin	29.0	6.5	19.2	3.3
ZL2029-20	20	Gold	29.0	6.5	19.2	3.3
ZL2038-20-T	20	Tin	37.8	6.5	28.0	3.3
ZL2038-20	20	Gold	37.8	6.5	28.0	3.3
ZL2045-20-T	20	Tin	45.3	6.5	35.5	3.3
ZL2045-20	20	Gold	45.3	6.5	35.5	3.3

Pitch: 2.54 mm

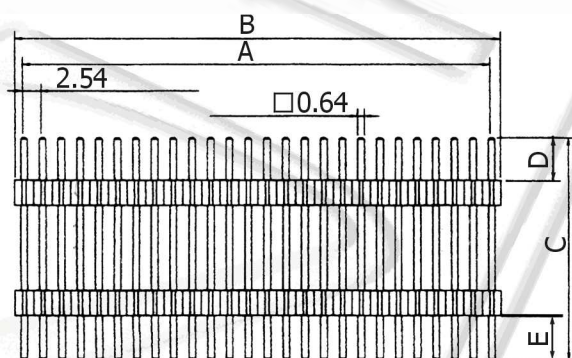

$$A = 2.54 * (N-1)$$

$$B = 2.54 * N$$

All dimensions in mm.