




REV.	MATTER	APP.	DATE
A			

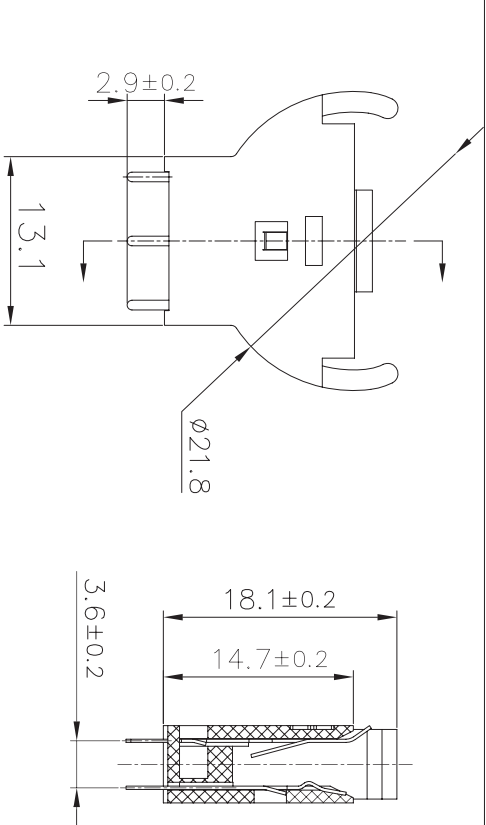


- NOTE:
1.MATERIAL:
a.HOUSING:THERMOPLASTIC GLASS FIBRE UL94V-0
b.CONTACT:PHOSPHOR BRONZE
(SURFACE PLATING: Ni 100u")
SEE ORDERING INFORMATION
2.ELECTRIC:
a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
c.DIELECTRIC VOLTAGE: 750V AC ONE SEC LEVEL
d.OPERATING TEMPERATURE: -55°C~ +85°C

ORDERING INFORMATION

BS-05-A**0*001

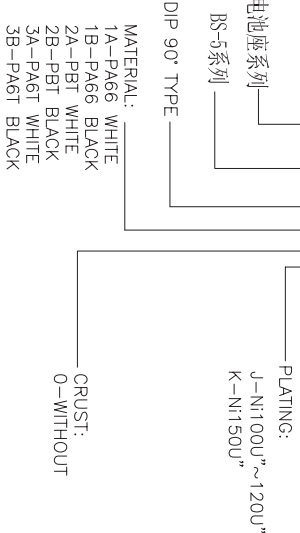


PCB Holes Diagram
Top View

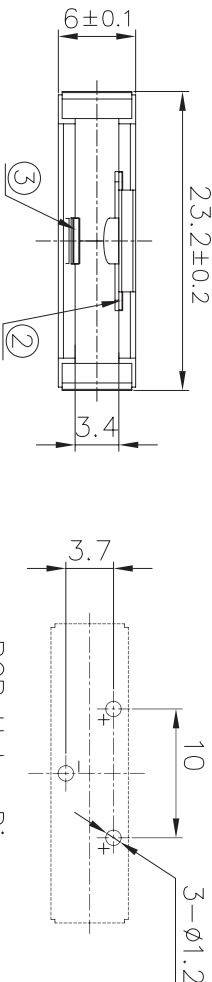


TOLERANCE

Tolerance: Unless otherwise specified

LINEAR	ANGLE
x, ±1	x', ±5'
.x ±0.38	.x' ±2'
.xx ±0.25	.xx' ±1'
.xxx ±0.10	

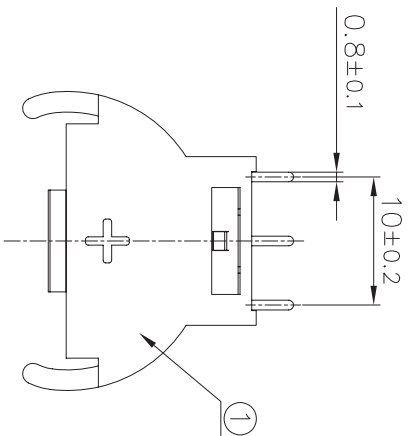

	TOLERANCE			
	Tolerance: Unless otherwise specified			
	LINEAR	ANGLE		
	$x. \pm 1$.x ± 0.38 .xx ± 0.25 .xxx ± 0.10	$x.^{\circ} \pm 1$.x $^{\circ} \pm 0.38$.xx $^{\circ} \pm 0.25$.xx $^{\circ} \pm 1$		
	3	TERMINAL-2	PHOSPHOR BRONZE	Ni-Plated
2	TERMINAL-1	PHOSPHOR BRONZE	Ni-Plated	
1	HOUSING	PA66	BLACK	
NO.	PART NAME	MATERIAL	COLOR/FINISHED	
日期 DATE	单位 UNITS	审核 CHECK	BATTERY HDLDER	
2008.07.20	mm	QJ.LIUQI	PART NO. BS-05-A1B0J001	
比例 SCALE	制图 DRAW	设计 DESIGN	TITLE:	
1/1	QJ.WU	QJ.LIU	三PIN电池座立式 (BS-5)	