




Insulated Female Disconnects

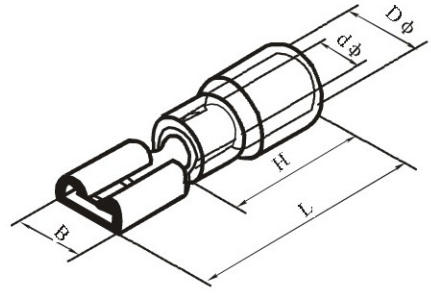

0.5~1.5mm² (22~16) I_{max}=10A

ITEM.NO.	MEMA TAB (mm)	Thickness of material (mm)	DIMENSION				
			B (mm)	d φ (mm)	D φ (mm)	L (mm)	H (mm)
FDD1.25-110(5)	0.5×2.8	0.3	3.8	1.70	3.80	19.0	10.0
FDD1.25-110(8)	0.8×2.8	0.3	3.8	1.70	3.80	19.0	
FDD1.25-187(5)	0.5×4.75	0.35	5.6	1.70	3.80	19.0	
FDD1.25-187(8)	0.8×4.75	0.35	5.6	1.70	3.80	19.0	
FDD1.25-205	0.5×5.2	0.35	6.5	1.70	3.80	20.0	
FDD1.25-250	0.8×6.35	0.4	7.4	1.70	3.80	21.0	

1.5-2.5mm² (16~14) I_{max}=15A

ITEM.NO.	MEMA TAB (mm)	Thickness of material (mm)	DIMENSION				
			B (mm)	d φ (mm)	D φ (mm)	L (mm)	H (mm)
FDD2-110(5)	0.5×2.8	0.3	3.8	2.3	4.3	19.0	10.0
FDD2-110(8)	0.8×2.8	0.3	3.8	2.3	4.3	19.0	
FDD2-187(5)	0.5×4.75	0.35	5.6	2.3	4.3	19.0	
FDD2-187(8)	0.8×4.75	0.35	5.6	2.3	4.3	19.0	
FDD2-205	0.5×5.2	0.35	6.5	2.3	4.3	20.0	
FDD2-250	0.8×6.35	0.4	7.4	2.3	4.3	21.0	
FDD2-312	0.8×8.0	0.4	9.0	2.3	4.3	23.0	

4~6mm² (12~10) I_{max}=24A

ITEM.NO.	MEMA TAB (mm)	Thickness of material (mm)	DIMENSION				
			B (mm)	d φ (mm)	D φ (mm)	L (mm)	H (mm)
FDD5.5-250	0.5×6.35	0.4	7.4	3.4	5.7	25.0	14.0
FDD5.5-375	1.2×9.4	0.5	10.9	3.4	5.7	29.6	